

## RMW2

RMW2

**Interior recess mounted wedge housing for ceiling mount applications where vandalism is likely.**

While being smaller than the RMWH that it replaced, the RMW2 offers a single security screw access and far easier camera access and adjustment.

The key features of the RMW2 are the range of camera adjustment and the inbuilt ceiling fastening system.

Applications: Corridors, entrances and lower height applications where dome enclosures may prove to be vulnerable to attack.

Omron tamper switch available as an option.





### Specification RMW2

- Construction:** 1.2mm Zinc anneal steel.
- Finish:** Moss Vale Sands lid and black texture base.
- Lens:** 6.0mm MR10 GE Lexan (Polycarbonate).
- Cable Entry:** 4 x 20mm entries, two at the rear, one in each side and one positioned at the top rear.
- Access:** 1 x 6mm stainless steel security screw.
- Maximum Camera Size:** 190mm long
- Shipping Weight:** 1.80kg
- Shipping Dimensions:** 310mm (L) x 165mm (W) x 165mm (H)

Part Number	Description
RMW2	Recessed mount wedge housing

RMW2 Recess Mount Wedge Housing

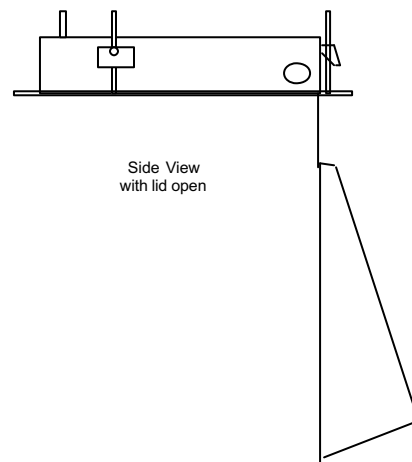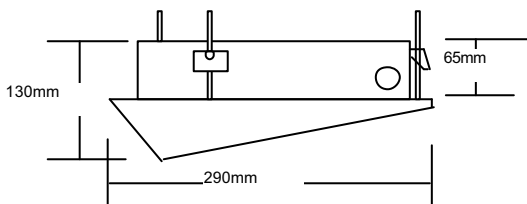

Specifications subject to change without notice

Available in Australia from



Available in New Zealand from

